(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 30 June 2005 (30.06.2005)

PCT

(10) International Publication Number WO 2005/059918 A1

(51) International Patent Classification7:

G11B 33/04

(21) International Application Number:

PCT/NL2004/000847

(22) International Filing Date: 4 December 2004 (04.12.2004)

(25) Filing Language:

Dutch

(26) Publication Language:

English

(30) Priority Data:

1024956

5 December 2003 (05.12.2003) NL

(71) Applicant and

(72) Inventor: COSTEL, Linta [NL/NL]; Henri Duparcplantsoen 76, NL-2551 XV Den Haag (NL).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

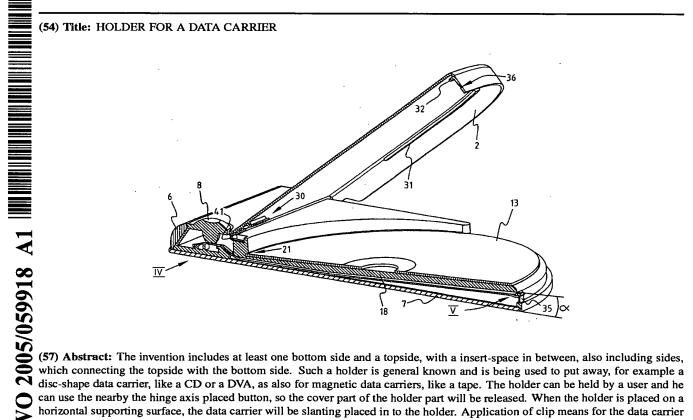

can use the nearby the hinge axis placed button, so the cover part of the holder part will be released. When the holder is placed on a horizontal supporting surface, the data carrier will be slanting placed in to the holder. Application of clip means for the data carrier is not necessary.